




REV		SH-T		DESCRIPTION			DATE	ECN	CHECKED
A	ALL	RELEASE	NEW				3/28/04	NEW	RBS

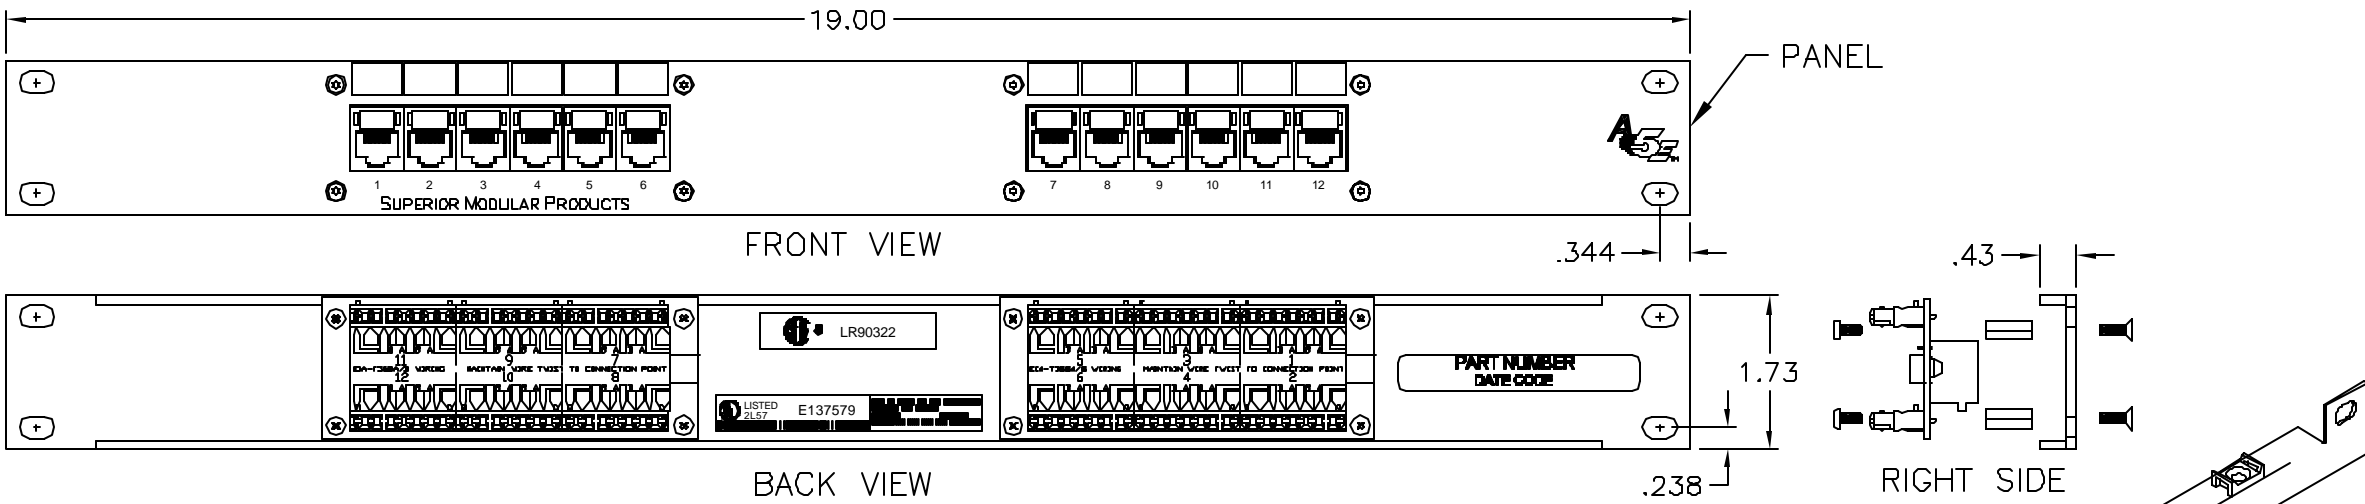

SPECIFICATIONS


APPLICATION SUPPORT LIST:

- VOICE
- 100 VG ANY LAN
- 155/622MBPS ATM
- 4/16 MBPS TOKEN RING
- 10 BASE-T ETHERNET
- 100 BASE-TX FAST ETHERNET
- 1000 BASE-T GIGABIT ETHERNET
- BROADBAND VIDEO
- 270 MBPS DIGITAL VIDEO
- ALL OTHER APPLICATIONS DEVELOPED FOR OPERATION OVER CATEGORY 5E OR CLASS D CABLING.

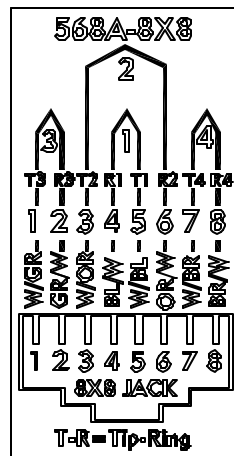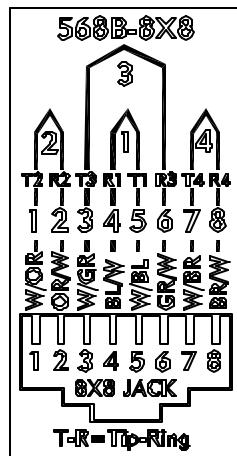

FEATURES/MATERIALS:

- CONSTRUCTED OF EXTRUDED AIRCRAFT GRADE BLACK ANODIZED ALUMINUM OR COLD ROLLED STEEL, DIMENSIONS AND MOUNTING HOLES PER EIA-310-D.
- ALL PLASTIC COMPONENTS ARE HIGH IMPACT SELF-EXTINGUISHING RATED 94V-0.
- CIRCUIT BOARD MATERIALS ARE FIBERGLASS/EPOXY FR-4 SOLDER MASKED ON BOTH SIDES.
- MODULAR JACK CONTACTS ARE HIGH-STRENGTH PHOSPHOR BRONZE OR BECU ALLOY WITH 50 MICRO-INCHES OF GOLD OVER 100 MICRO-INCHES OF NICKEL (OR EQUIVALENT AU/PD/NI PROCESS)
- 110 IDC CONTACTS ARE PHOSPHOR BRONZE PLATED WITH TIN, AND FIRE-RETARDANT PLASTIC.
- UL LISTED.
- CSA CERTIFIED.



UNCONTROLLED COPY	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"	
MATERIAL PANEL: CRS 18 GAGE BLOCK & CONN BODY: POLYCARBONATE UL RATING UL94 V-0	
FINISH PANEL: PAINTED BLACK PER SMP SPEC NO. 10002501	
DRAWN BY D.A.HOLBERT	DATE 3/28/04
CHECKED BY R.B.SMITH	DATE 3/31/04
ENGINEER J.YANIK	DATE 3/28/04
APPROVED B.EVERETTE	DATE 3/31/04
PREVIOUS DWG	
NEXT DWG	FILENAME C106256A.DWG

DCC1288/110A5E	PATCH PANEL, 12 PORT, A5E, EIAB/EIAA
SMP PART NO.	DESCRIPTION



DWG TITLE		SIZE	DWG NO.	REV
PATCH PANEL ASSEMBLY, 12 PORT, A5E, EIAB/EIAA		B	C106256	A
SCALE	SHEET		1 OF 1	
NONE				